




F202 D5

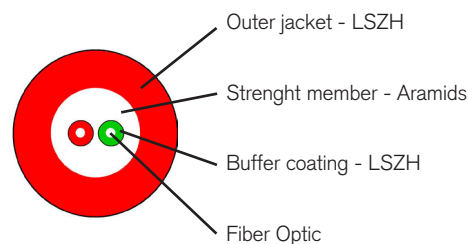

Technical specifications 2 Fibers SM LSZH cable F202 D5 **CPR Dca**

		F202 D5
Code		5200702
Description		500m spool with 2 Fibers Single Mode LSZH cable
Monomode Fiber type		G657A2
Core diameter		Ø 9.2±0,2 µm
Cladding diameter		Ø 125±0,7 µm
Buffer coating	Diameter	Ø 900±50 µm
	Type	Tight
	Material	LSZH
	Colors	1 Red, 1 Green
Outer jacket	Diameter	Ø 4,0±0,5 mm
	Fibers	2
	Strenght member	Aramid yarn
	RIP cord	Sí
	Material	LSZH
	Color	RAL 3004
Attenuation	1350nm	≤ 0,5 dB/Km
	1550nm	≤ 0,5 dB/Km
Bend radius		20 mm
Working temperature		-40 ~ +70 °C
Storage temperature		-40 ~ +70 °C
Pull Test	Long term	600 N
	Short term	1500 N
Crush resistance	Long term	1350nm: ≤ 0,5 dB/Km
	Short term	1550nm: ≤ 0,5 dB/Km
Reaction to fire		Dca-s1, d1, a1
Presentation		500 m en bobina de plástico