

ICTPIGTAIL series

2 Fibers Pigtail

with SC/APC connectors



ICTPIGTAIL series


Technical specifications 2 Fibers Pigtail with SC/APC connector ICTPIGTAIL series

		ICTPIGTAIL 10	ICTPIGTAIL 15	ICTPIGTAIL 20	ICTPIGTAIL 30	ICTPIGTAIL 40	ICTPIGTAIL 50
Code		5200310	5200315	5200320	5200330	5200340	5200350
Description		2 Fibers Single Mode Pigtails with SC/APC connectors					
Monomode Fiber type		G657A2					
Fiber Mode		SM Ø 9/125 µm					
Buffer coating	Diameter	Ø 0,9±0,05 mm					
	Type	Tight					
	Material	LSZH					
	Colors	1 Red, 1 Green					
Outer jacket	Diameter	Ø 4,0±0,5 mm					
	Fibers	2					
	Material	LSZH					
	Color	RAL 3004					
Insertion loss		≤ 0,2 dB					
Return loss		≥ 60 dB					
Durability (500 connections)		≤ 0,2 dB					
Working temperature		-40 ~ +85 °C					
Storage temperature		-40 ~ +85 °C					
Pull Test		600 N					
Lenght		10 m	15 m	20 m	30 m	40 m	50 m
Connectors		SC/APC					
Bend radius		20 mm					
Presentation		Individual bag					
Packing quantity		1 / 25 / 50	1 / 25 / 50	1 / 15 / 30	1 / 12 / 24	1 / 5 / 10	1 / 5 / 10

ICTPIGTAIL series

2 Fibers Pigtail

with SC/APC connectors

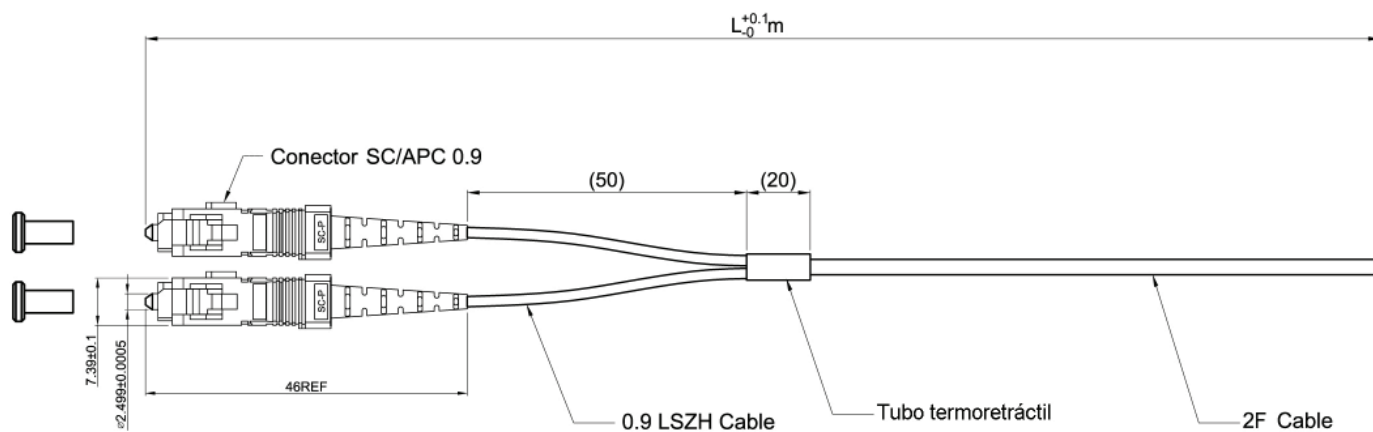

L: Longitud Pigtail

ICTPIGTAIL series - dimensions in mm