




K 250 W GOLD

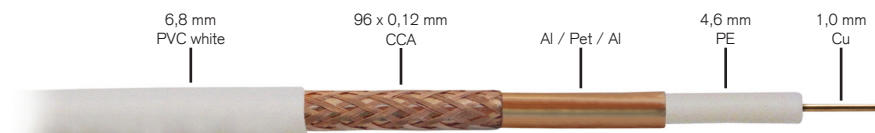

K 250 W GOLD

Technical specifications. 6,8 mm coaxial cable K 250 W GOLD



		K 250 W GOLD
Code		0703425
Inner conductor (mm) Ø		1,0 Cu
Dielectric (mm) Ø		4,6 PE
Foil material		Al / Pet / Al (external layer copper colored)
Braiding material		CCA copper colored
Number of wires (braiding)		96
Braiding composition		16 x 6 x 0,12 mm
Outer jacket (mm) Ø		6,8 PVC white
Screening factor (30 - 900 MHz)		> 86 dB
Nominal attenuation (dB / 100 m)	47 MHz	4,8
	175 MHz	8,3
	470 MHz	13,5
	862 MHz	18,8
	950 MHz	19,9
	1350 MHz	24,0
	1750 MHz	27,5
	2150 MHz	30,9
Lenght (m)		100
Impedance (Ω)		75
Net weight (Kg)		4,21
Presentation		100 m cardboard spool
Packing quantity		1 / 4

