


Reel K 290 WD

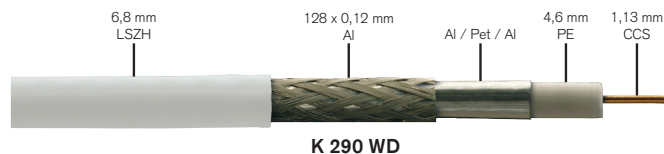

K 290 WD

Technical specifications. 6,8 mm coaxial cable. K 290 WD

CPR Dca



		K 290 WD
Code		0703608
Inner conductor (mm) Ø		1,13 CCS
Dielectric (mm) Ø		4,6 PE - Physical foam
Foil material		Al / Pet / Al
Braiding material		Al
Number of wires (braiding)		128
Braiding composition		16 x 8 x 0,12 mm
Outer jacket (mm) Ø		6,8 LSZH white
Screening factor (30 - 900 MHz)		> 90 dB
Nominal attenuation (dB / 100 m)	47 MHz	3,7
	175 MHz	6,7
	470 MHz	11,2
	862 MHz	16,2
	950 MHz	17,5
	1350 MHz	21,8
	1750 MHz	25,0
	2150 MHz	28,2
Lenght		100 m
Impedance		75 Ω
Net weight		4.17 Kg
Reaction to fire		Dca-s1, d1, a1
Declaration of Performance (DoP)		DoP-0703608
Presentation		100 m cardboard spool
Packaging quantity		1 / 4

