


Boîte K 290 W



### Spécifications techniques. Câble coaxial 6,8 mm. K 290 W

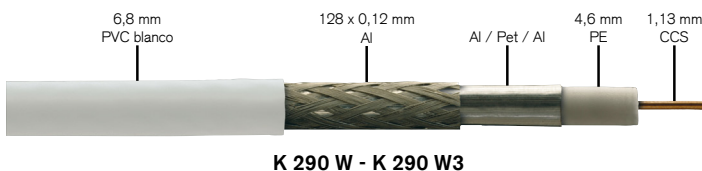

|                                             | K 290 W               | K 290 W3          |
|---------------------------------------------|-----------------------|-------------------|
| <b>Code</b>                                 | 0703408               | 0703410           |
| <b>Conducteur intérieur (mm) Ø</b>          | 1,13 CCS              | 1,13 CCS          |
| <b>Diélectrique (mm) Ø</b>                  | 4,6 PE                | 4,6 PE            |
| <b>Feuillard</b>                            | Al / Pet / Al         | Al / Pet / Al     |
| <b>Tresse</b>                               | Al                    | Al                |
| <b>Nb de brins</b>                          | 128                   | 128               |
| <b>Composition tresse</b>                   | 16 x 8 x 0,12 mm      | 16 x 8 x 0,12 mm  |
| <b>Gaine (mm) Ø</b>                         | 6,8 PVC blanc         | 6,8 PVC blanc     |
| <b>Blindage (30 - 900 MHz)</b>              | > 90 dB               | > 90 dB           |
| <b>Atténuation nominale (dB / 100 m)</b>    | <b>47 MHz</b>         | 3,7               |
|                                             | <b>175 MHz</b>        | 6,7               |
|                                             | <b>470 MHz</b>        | 11,2              |
|                                             | <b>862 MHz</b>        | 16,2              |
|                                             | <b>950 MHz</b>        | 17,5              |
|                                             | <b>1350 MHz</b>       | 21,8              |
|                                             | <b>1750 MHz</b>       | 25,0              |
|                                             | <b>2150 MHz</b>       | 28,2              |
| <b>Longueur (m)</b>                         | 100                   | 300               |
| <b>Impédance (Ω)</b>                        | 75                    | 75                |
| <b>Poids net (Kg)</b>                       | 4,17                  | 12,6              |
| <b>Présentation</b>                         | 100 m / bobine carton | 300 m bobine bois |
| <b>Réaction au feu</b>                      | CPR-Fca               | CPR-Fca           |
| <b>No. Déclaration de prestations (DoP)</b> | DOP-0703408           | DOP-0703410       |
| <b>Code EAN 13</b>                          | 8436023599177         | 8436023599184     |
| <b>Quantité par emballage</b>               | 1 / 4                 | 1                 |

