


K 300 WE reel



K 300 WE

Technical specifications. 6,8 mm coaxial cable K 300 WE

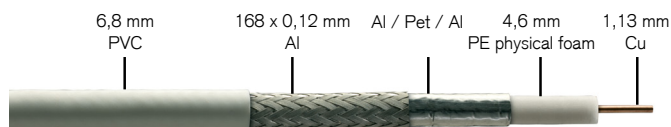

	K 300 WE
Code	0703520
Inner conductor (mm) Ø	1,13 Cu
Dielectric (mm) Ø	4,6 PE - Physical foam
Foil material	Al / Pet / Al
Braiding material	Al
Number of wires (braiding)	168
Braiding composition	24 x 7 x 0,12 mm
Outer jacket (mm) Ø	6,8 PVC white
Screening factor (30 - 900 MHz)	> 100 dB
Nominal attenuation (dB / 100 m)	
47 MHz	3,7
175 MHz	6,7
470 MHz	11,2
862 MHz	16,2
950 MHz	17,5
1350 MHz	21,8
1750 MHz	25,0
2150 MHz	28,2
Lenght (m)	100
Impedance (Ω)	75
Net weight (Kg)	4,32
Reaction to fire	Eca
Declaration of Performance (DoP)	DOP-0703520
Presentation	100 m cardboard spool
Packaging quantity	1 / 4