




PCFAPC-S-10M

Technical specifications Fiber Optic Simplex Patchcords PCFAPC-S series

		PCFAPC-S-5M	PCFAPC-S-10M	PCFAPC-S-15M
Code		5201305	5201310	5201315
Description		Single Mode Simplex Fiber Optic Patch cords with SC/APC - SC/APC connectors		
Monomode Fiber type		G652D		
Fiber Mode		SM Ø 9/125 µm		
Outer jacket	Diameter	Ø 3,0		
	Fibers	1		
	Material	PVC		
	Color	Yellow		
Insertion loss		≤ 0,2 dB		
Return loss		≥ 60 dB		
Durability (500 connections)		≤ 0,2 dB		
Working temperature		-40 ~ +85 °C		
Storage temperature		-40 ~ +85 °C		
Pull Test		9 Kg		
Lenght		5 m	10 m	15 m
Connectors		Simplex SC/APC		
Presentation		Individual bag		
Packing quantity		1 / 50 / 200	1 / 50 / 100	1 / 35 / 70

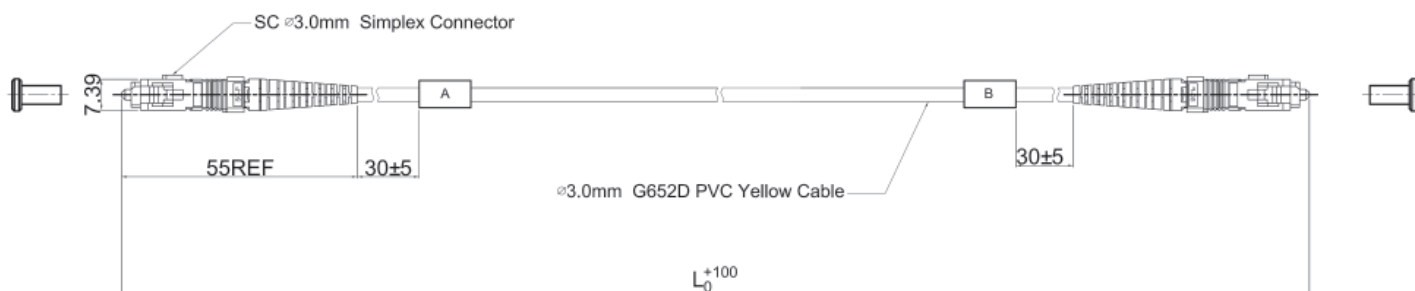

PCFAPC-S series - dimensions in mm