


MAX T230 HD

Digital Terrestrial Receiver



Front MAX T230 HD

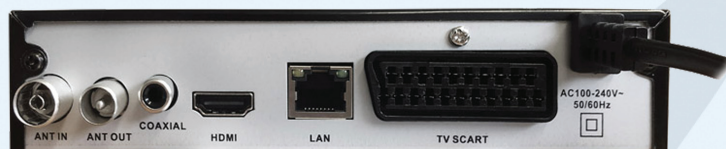

Rear MAX T230 HD

Latest generation DVB-T2 digital terrestrial decoder with HEVC Main 10 Profile support.

Compact and practical, equipped with a USB port to which an external memory device can be connected to play photos, audio and video using the Media Player function. Timer to program automatic shutdown. **MAX T230 HD** allows automatic search of TV and radio channels, up to 5000 channels, automatically reorders them using the LCN function. Equipped with 2-in-1 universal remote control.

Main features:

- Up to 5,000 TV and Radio channels.
- Supports the DVB-T2 standard and encoding.
- Primary HEVC H.265 main 10 (10-bit color depth).
- Search and automatic classification of channels (LCN).
- EPG, guide and favorite programs and selection of up to 8 lists.
- Multimedia playback (photos, audio, video).
- IEC IN, SCART, HDMI, RJ45, USB.
- Full HD 1080p

Code	IMA08P0710040
Supported Programs	Free To Air SD/HD
Supported Standards	DVB-T, DVB-T2
Input modulation	64QAM, 256QAM
Supported Video Codecs	MPEG-2, MPEG-4/H.264 AVC, HEVC/H.265 Main 10 bit
Appearance format	4:3, 16:9
HDMI video resolution max.	1080p@60Hz
Scart video resolution max.	576i@25Hz
Supported audio codecs	PCM, MPEG-1, SPDIF, Dolby Digital, Dolby Digital+
Number of storable channels	5.000
OSD menu languages	IT, EN, FR, ES, PT, DE, NL
First installation guide	Yes
Timer function	Yes
Radio mode	Yes
Signal quality/level indicator	Yes
Audio/video output	1 SCART, 1 HDMI
Digital audio output S/PDIF	Yes, coaxial
Ethernet LAN RJ45 port	1 ethernet 10/100
USB 2.0 port	1, for software updates
Input Frequency	50 - 870 MHz
Input level	45 -100 dBμV
Type of connections	ANT IN: IEC female RF OUT: IEC male
Update via OTA	Yes
Remote Power Supply	Antenas activas: 5 VDC
Supply Voltage	100 ± 240 - 50/60 VAC/Hz
Max consumption	Max. 7,5 W
Operating temperature	-5 °C - +45 °C
Dimensions (An. x Al. x Pr.)	168 x 36 x 94 mm
Weight	450 g
Box contents	- Receiver - 2 in 1 remote control - 2 AAA batteries - User manual
Code EAN	8055271136431
Standards Compliant	CE / ROHS