




MAX S250 HD

High Definition Digital Satellite Receiver

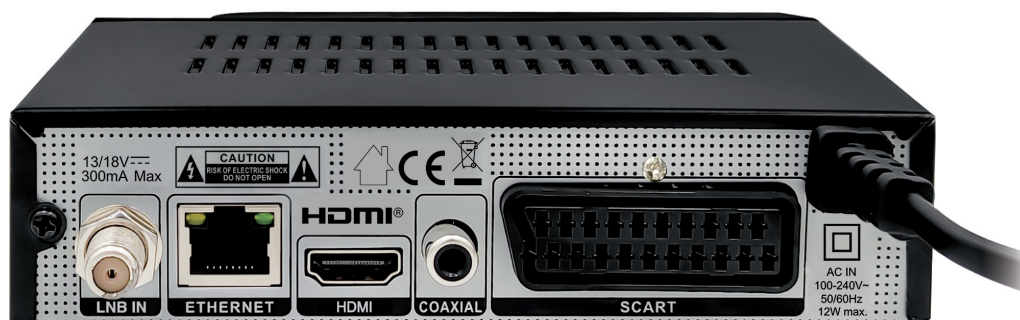

Technical Features MAX S250 HD

Sleep Timer	Coaxial SPDIF digital audio output	Weather forecast
FTA Free channels	Electronic Program Guide (EPG)	Unicable1 & Unicable 2
Upgrade by USB	HDMI® / Scart output	Image player
OSD multi-language	DiSEqC 1.0, 1.1, 1.2 - GoToX	Music player
Teletext	3500 channels	Video player

Logistic and commercial information

Measures: 150 x 95 x 40 mm	Code: 0720063	Packaging: 10 pcs
Weight: 0.28 Kg	EAN Code: 8436545307663	



High Definition Digital Satellite Receiver MAX S250 HD

VIDEO	
Decoding Bit rate Aspect ratio Active pixel (Scart, RCA) Active pixel (HDMI®) Output connector	MPEG-2 SD&HD, MPEG-4 H.264/AVC SD&HD Máx. 20 Mbps 4:3PS, 4:3LB, 16:9, Auto AUTO, 720 x 576 @25fps, 720 x 480 @30fps AUTO, 480i_30, 480p_60, 576i_25, 576p_50, 720p_50, 720p_60, 1080i_25, 1080i_30, 1080p_50 y 1080p_60 HDMI® / Scart
AUDIO	
Decoding Mode Bit rate Output connector	MPEG-2/MPEG-1 layer I, II & III, AC3, AAC (AAC-LC) Mono, Dual, Stereo, Joint stereo Máx. 384Kbps HDMI® / Scart / Coaxial SPDIF
DEMODULATOR	
Demodulation Multiplexing Outer code Inner code Energy dispersion	QPSK, 8PSK SCPC/MCPC RS (204, 188, 8) ALL DVB rates DVB-S & DVB-S2 recommendation
INPUT SIGNAL	
Frequency Input level Channel bandwidth Input socked	950MHz ~ 2150MHz -65dBm ~ -25dBm 36MHz F-type connector
LNB CONTROL	
Power supply Polarized control Unicable System DiSEqC control	13/18V (300mA max) with short circuit protection Polarized control 13/18V polarization (V/H) Yes, Unicable and Unicable 2. DiSEqC1.0, DiSEqC1.1 and DiSEqC1.2, GoTo-X
MISCELLANEOUS	
Ethernet Connector (LAN) Ethernet Speed USB Connector Power input Stand-by power consumption (Power Consumption without LNB power) Operation temperature Dimension (W x D x H) Weight	RJ 45 10/100 Mbits USB 2.0 100-240V~50/60Hz Max. 12W < 0,5 watt < 5 watt +5° to +40° C 150x95x40 mm 0.286 Kg

